


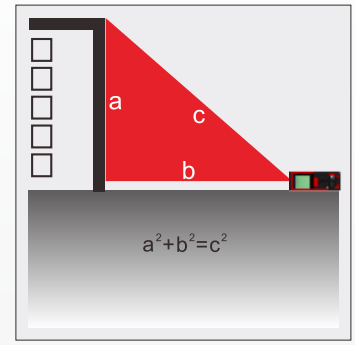




# PD-5 SERIES

## HAND-HELD DISTANCE METER





## SPECIFICATIONS

Parameter \ Model	PD-54S	PD-56S	PD-58S	PD-510S	PD-512S
Measuring range	0.05m~40m	0.05m~60m	0.05m~80m	0.1m~110m	0.1m~120m
Measuring precision(typical)	± 1.5mm	± 1.5mm	± 1.5mm	± 1.5mm	± 1.5mm
Laser class	II	II	II	II	II
Laser type	620-690 nm, <1mW				
Type	indoor	indoor	outdoor	outdoor	outdoor
Operation temperature	-10°C ~+50°C	-10°C ~+50°C	-10°C ~+50°C	-10°C ~+50°C	-10°C ~+50°C
Selectable datum side	●	●	●	●	●
Area	●	●	●	●	●
Pythagoras	●	●	●	●	●
Volume	●	●	●	●	●
Plus/minus calculation	●	●	●	●	●
Data storage	○	99	99	99	99
Time delay measurement	○	○	●	●	●
Metope measurement	○	○	●	●	●
Dip angle measurement	○	○	●	●	●
Triangle area	○	○	○	●	●
Trapezoidal measurement	○	○	○	●	●
Distance stake-out	○	○	○	●	●
Graphics auxiliary targeting	○	○	○	built-in optical telescope	cmos imging sensor
Display	three lines stroke segment			2.2" stroke segment screen	2.2" color screen
Battery	AAA2x1.5V	AAA2x1.5V	AAA4x1.5V	lithium battery	lithium battery
Battery life	5000	5000	5000	20000	20000
IP	IP54	IP54	IP54	IP54	IP54
Size(mm)	121x45x25			137x52x29	